



Compact and Agile



eZ-Ho₁st

AUTOMATION MADE EASY

Integrated load cell

Compact size

Quick connection points for
eZ-Trolley, eZ-Rotator, and
50cm box-truss

Multiple output pulley
configurations for line placement

Built-In gimbal pulleys





DGUV V17/18 compliant
(formerly BGV-C1)

Configurations for one and two
line lifting applications



eZ-Hoist eZYoyo

| | STANDARD | OPTIONAL |
|------------------|----------------------|----------------------------|
| Voltage | 380-420VAC | 200-230VAC, 480VAC 50/60hz |
| Motor Size | 3kW (4HP) | --- |
| Capacity | 100kg (220lbs) | --- |
| Speed | 2 m/sec (6.5 ft/sec) | --- |
| Lift | 25 m (82 ft) | --- |
| Wire Rope Size | 4mm (5/32") | --- |
| Motor Encoder | TTL Incremental | Sin/Cos |
| Absolute Encoder | SSI | Hiperface, EnDat |
| Weight | 130 kg (287lbs) | --- |

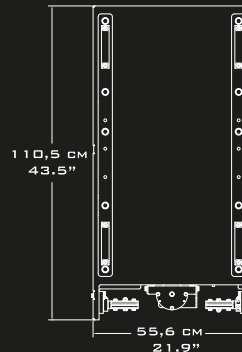

WORLD HEADQUARTERS
611 Industry Road | Louisville, KY 40208
tel: +1.502.637.2500

EZ-AXIS.COM

EUROPEAN OPERATIONS
Veldzigt 3 3454 PW | De Meern, the Netherlands
tel: +31(0)30-2428280